

* = 1/2 STD TOLERANCE


SECTION DATA:
 $I_{xx} = 11\,442 \text{ mm}^4$
 $I_{yy} = 11\,442 \text{ mm}^4$
 Theta = 0.
 RadG_x = 10. mm
 RadG_y = 10. mm
 X_{Cleft} = 12.70 mm
 X_{Cright} = 12.70 mm
 Y_{Ctop} = 12.70 mm
 Y_{Cbot} = 12.70 mm
 Z_{xxtop} = 901 mm³
 Z_{xxbot} = 901 mm³
 Z_{yyleft} = 901 mm³
 Z_{yyright} = 901 mm³

a = 0.80 radius
 0.40 RADIUS ON ALL OUTSIDE CORNERS
 UNLESS OTHERWISE SPECIFIED

EXTRUDED FINISH : ARCHITECTURAL

NO	DATE	DR	REVISION
			A

AREA	117.4	SQ MM
WEIGHT	0.318	KG M
PERIMETER	192.1	MM
ANOD PERIM	100.2	MM
PAINT PERIM	100.2	MM
C CIRCLE DIA	35.	MM
FACTOR	603.	
ALLOY	6063	
TEMPER	T6	

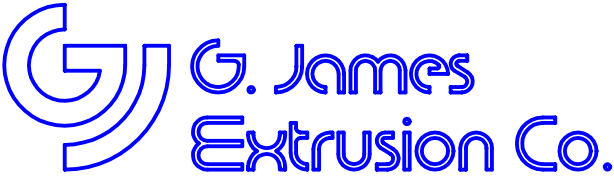

A.C.N 010 828 234
 1082 KINGSFORD SMITH DRIVE, EAGLE FARM, QUEENSLAND, 4009
 PO BOX 1376, EAGLE FARM BC, 4009
 PHONE : (07) 3877 2833 FAX : (07) 3877 2890

CUSTOMER			
G. JAMES EXTRUSION Co.			
CUSTOMER PART NAME		NO.	
25.4 x 1.22 SQUARE TUBE R\C			
SCALE		TOLERANCES IN ACCORDANCE WITH AS 1866-1986 APPLY UNLESS OTHERWISE SPECIFIED	
2:1			
DRAWN	CHECK	DATE	DWG. NO.
A.T		22/08/90	931-025